

Drive your way"

Santa Fe



Santa Fe steps out in style

Santa Fe represents three Hyundais in one. Such is the model's versatility that combines a reassuring off-road capability with the comfort and driveability of a large passenger car and the practicality of a people-carrier for up to seven people. Top quality goes without saying. Naturally, it has all the convenience and safety features one would expect of a Hyundai. The high seating positions provide above-it-all visibility for added safety and reassurance. Truly, this is a car for all reasons.




More Santa Fe







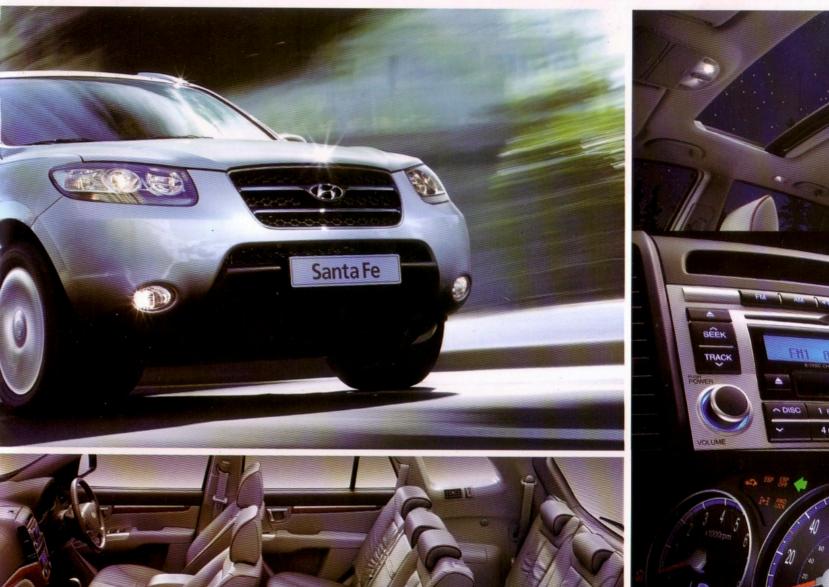









Natural Khaki 2H











Black Pearl 2Z

INTERIOR TRIM









Maple Wood GLS



Cloth Beige





Maple Wood GLS









Cherry Wood GL

DIMENSIONS

unit: mm



Hyundai Lanka (Pvt) Ltd 1035, Pannipitiya Road, Battaramulla, Sri Lanka, Tel: 94 11 2 866 866







Tel: 94 11 2 866 866

Fax: 94 11 2 86 1718

Some of the equipment illustrated or described in this catalogue may not be supplied as standard equipment and may be available at extra cost.

Hyurdial Motor Co. reserves the right to change specifications and equipment without prior notice.

The color plates shown may very slightly from the actual colors due to the limitations of the printing process.

Please consult your dealer for full information and availability on colors and trim.

ENGINE .

Туре	2.7 V6 DOHC	2.2 CRDi
Displacement (cc)	2,656	2,188
Bore x Stroke (mm)	86.7 x 75.0	87.0 x 92.0
Compression Ratio	10.4	17.3
Max. Power (kW/rpm)	139 (189 ps) / 6,000	110 (150 ps) / 4,000
Max. Torque (Nm/rpm)	248 (25.3 kg.m) / 4,000	335 (34.2 kg.m) / 1,800~2,500

* On leaded fuel engines, power & torque figures vary in accordance with local fuel and climate characteristics.

* Please ask your dealer for available engines.

DRIVE TRAIN

Туре		Manual			Automatic			
Engine		2.7 V6 DOHC		2.2 CRDI		2.7 V6 DOHC	2.2 CRDi	
Drive Type		FWD	4WD	FWD	4WD	4WD	FWD	4WD
General	General 5-Speed Tran		ed Transaxle	axle with Floor Shift		4-Speed Transaxle	5-Speed Transaxle	
Gear Ratio 1st		3.615		3.875		2.842	3.789	
	2nd	1.931		2.130		1.495	2.064	
	3rd	1.696		1.205		1.000	1.421	
	4th	1.276		0.848		0.731	1.0	134
	5th	1.027		0.827			0.7	28
	Reverse	3.588		4.413		2.720	3.808	
Final Gear Ratio		5.071(for 1,2,R)/3.737(3,4,5)		4.500(for 1,2,3,4)/3.706(5,R)		4.520	3.684	
Clutch Type		Push Type (Dry single plate)			Torque Converter			
Lubricant Oil Capacity (litre) 1.9		1.	85	5 8.5		.9		

SUSPENSION

Suspension	Front	MacPherson Strut Type
	Rear	Multi Link Type
Shock Absorber	Front	Hydraulic Double Acting Strut Type
	Rear	Hydraulic Double Acting Shock Absorber Type

STEERING WHEEL

Туре	Hydraulic Power Assisted, Rack & Pinion	26.0		
Overall Steering Gear Ratio	16.5			
Steering Wheel Turn (lock to lock)	3.24	**		
Min. Turning Radius (m)	5.45		2000	

BRAKES

General		Dual-Diagonal, Split-Circuit, Power-Assisted Braking System with EBD
Front	2WD	16-Inch Ventilated Outer Disc, Floating-Caliper Brakes with Pads Wear Warning Device
	4WD	16-Inch Ventilated Outer Disc, Floating-Caliper Brakes with Pads Wear Warning Device
Rear	with ABS	Ø302(2WD/4WD) Solid Outer Disc, Floating-Caliper Brake with Wear Warning Device
ABS		4-Wheel Electronic, 4-Sensor, 4-Channel Electronic Brake Distribution, Brake Torque Distribution System (EBD)

DIMENSIONS

Exterior	Overall Length	4,650 (4,675: Two Tone Bumper)			
(mm)	Overall Width	1,890			
	Overall Height	1,725 (1,795: Roof Rack)			
	Wheel Base	2,700			
	Wheel Tread	Front : 1,615 Rear : 1,620			
Interior (mm)	Interior	Length:1,865/2,570(5/7Passenger) Width: 1,555 Height: 1,220			
	Leg Room	1st Row: 1,082 2nd Row: 935 3rd Row: 795			
	Head Room	1st Row: 1,019 2nd Row: 1,002 3rd Row: 885			
	Shoulder Room	1st Row: 1,511 2nd Row: 1,489 3rd Row: 1,369			
	Hip Room	1st Row: 1,417 2nd Row: 1,398 3rd Row: 1,134			
Cargo (litre)	SAE (Behind 1st Row/2nd Row)	2,247 / 969			
	VDA 213 / 214	774 / 1,582			